

94126 Pressure Vent

The Shand & Jurs 94126 Pressure Vent is designed to relieve pressure on low pressure storage tanks, and is ideally suited as a low cost rim vent on floating roof tanks. Also, it is suitable as an auxiliary pressure or emergency vent on small low pressure tanks. The Model 94126 is available in a 6-inch size only, with screwed connection.

Specifications

Standard Setting:

1/2 oz./sq.²

Connection:

6" NPT

Materials of Construction

Body:

Cast Aluminum

Cover:

Cast Aluminum

Weather Hood:

Aluminum

Screen:


Galvanized Steel, 316 Stainless Steel



Features

- Economical
- Ideally Suited for Rim Vent
- Easy Installation
- Available in 6" Size

Dimensions:

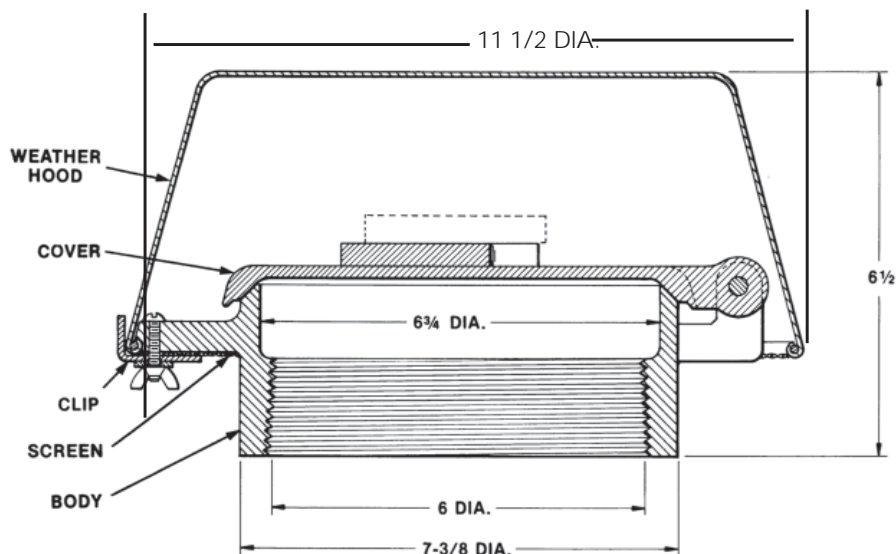

All designs subject to change. Certified dimensions and specifications available upon request.

94126 Ordering Guide

Model Number Selection

The model number will consist of a base number **94126** followed by 2 digit numbers. These digits will represent 1 option table.

94126 - AB

Ordering Information

Specify:

1. Model 94126 Pressure Vent
2. Size
3. Setting, if other than standard
4. To Specify CE for Ordinary Locations use Table B3
5. ATEX Certification for Group IIB, IIA EU Locations use Table B2



Table AB - Size and Setting

Option AB	Description
01	Standard Settings
11	Non-Standard Settings
02	ATEX - Standard Settings
12	ATEX - Non-Standard Settings
03	CE - Standard Settings
13	CE - Non-Standard Settings

Materials of Construction

Body:	Cast Aluminum
Weather Hood	Aluminum
Cover	Cast Aluminum
Screen	Galvanized Steel Table B=1; 3
Screen	316 SS Table B=2

Pressure Settings

1/2 oz./in. ² (0.865" W.C.)	Standard Setting
5.7 oz./in. ² (10" W.C.)	Maximum Setting