

94407 Horizontal Inline Deflagration Flame Arrester

The Shand & Jurs 94407 Horizontal Inline Deflagration Flame Arrester is designed to provide a positive flame stop in horizontal gas piping systems containing flammable vapors having a low flash point. The 94407 not only provides exceptional protection against propagation of flame from external source but also offers maximum flow capacity. It is specifically designed to prevent liquid accumulation in the tube bank assembly.

The tube bank design, consisting of a spiral-wound crimped ribbon around a solid core, maximizes flow capacity with minimum pressure drop. The standard flame arrester is Factory Mutual (FM) approved to meet the ATEX application requirements per EN 12874 and ISO 16852.


Periodic inspection, maintenance and replacement of the tube bank is easily accomplished by simply removing tie-bolts and minimally expanding the remaining jack screws. Once the upper and lower body sections are expanded, the tube bank is easily removed with the aid of a handle.

Standard body construction includes light weight cast aluminum, cast steel, 304 stainless steel and 316 stainless steel body materials suitable for most environments. Tube bank is available in 304 stainless steel or 316 stainless steel as standard. A complete range of sizes from 2" [50 mm] through 12" [300 mm] are available with flat face or raised face flanges to match ANSI, EN1092-1 or JIS connections.

For highly corrosive applications, body and tube bank construction of Duplex SS, Hastelloy C, or Alloy 20 are available.

Temperature monitor device to be installed on unprotected side of Tube Bank.

Temperature monitor devices available. Consult Factory.

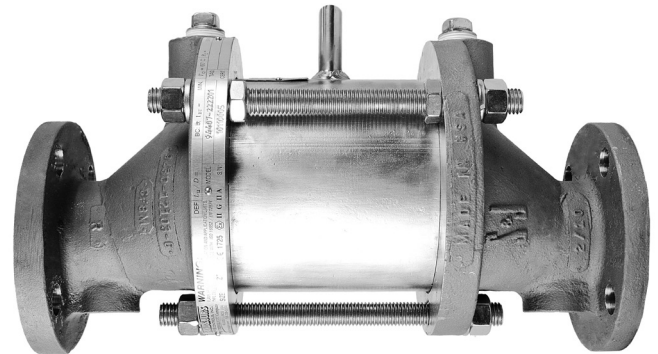

Features

- ATEX EN 12874 Approved
- ISO 16852 Approved
- Unitized tube bank design
- Maximum protection and efficiency with minimum pressure drop
- Wide range of standard construction materials
- Easy inspection and maintenance, due to simple removal of tube bank
- Complete range of flange sizes from 2" (50 mm) to 12" (300 mm) ANSI, EN1092-1, JIS. Consult factory for larger sizes

Specifications

Sizes:

2", 3", 4", 6", 8", 10" and 12"

Max. Static Pressure:

3.45 BARG (50 PSIG)

Max. Operating Pressure:

Sizes 2"-6" 1.1 BARA (16.20 PSIA)
8"-12" 1.09 BARA (15.95 PSIA)

Max. Operating Temp:

60°C (140°F)

Flange Rating:

To match drilling of ANSI 125/150 lb. flat face, raised face flange. EN1092 PN 10/16, and JIS 10K options.

Approval:

ATEX Directive 94/4/EC and EN 12874, ISO 16852 (Short Term Burn)

NOTE: Aluminum and Cast Iron bodies are only approved for ISO 16852.

Gas Application:

IIA (NEC Group D)

Materials of Construction

Body:

Carbon Steel, 304 Stainless Steel, 316 Stainless Steel, Aluminum, Duplex Stainless Steel, Hastelloy C or Alloy 20

Hardware:

Carbon Steel, 304 Stainless Steel, 316 Stainless Steel, Duplex Stainless Steel, Hastelloy C or Alloy 20

Tube Bank:


Carbon Steel, 304 Stainless Steel, 316 Stainless Steel, Duplex Stainless Steel, Hastelloy C or Alloy 20

Gaskets:

High Temperature Synthetic Composition

Outline Dimensions

Dimensions in Inches				
Vent Size	"A"	"B"	Diameter "D"	"F"
2"	14 1/2	8 5/32	6	5/8
3"	16	10 1/16	7 1/2	3/4
4"	20	12 3/16	9	15/16
6"	24 3/8	16 1/64	11	1
8"	32 1/8	20 7/8	13 1/2	1 1/8
10"	33 3/8	24 3/4	16	1 3/16
12"	34 3/8	29 5/16	19	1 1/4

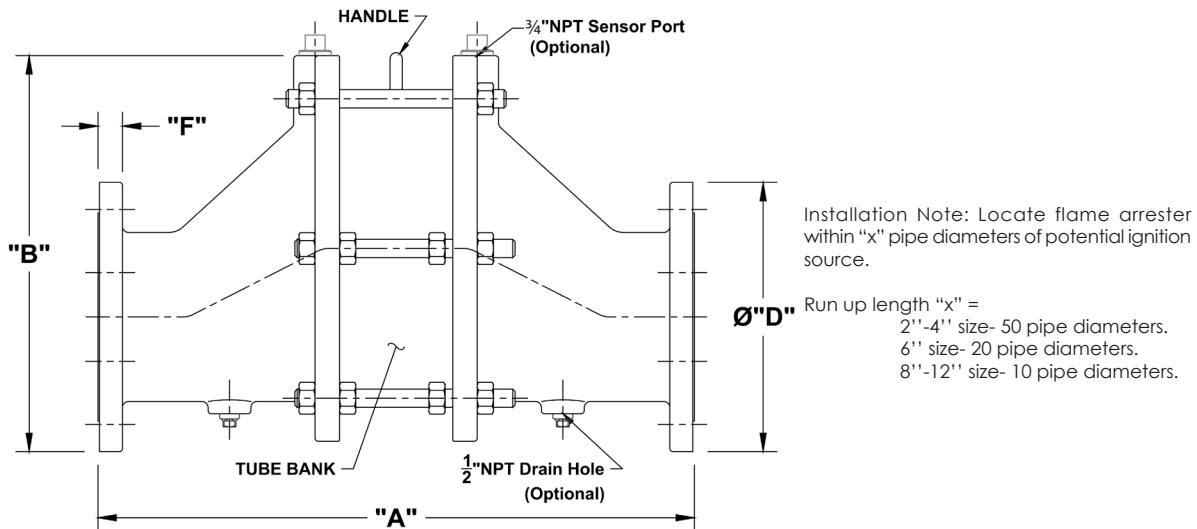

All designs subject to change. Certified dimensions and specifications available upon request.

94407 Ordering Guide

Model Number Selection

The model number will consist of a base number **94407** followed by 6 digit letters. These digits will represent 3 option tables.

94407 - AB - CD - EF

Ordering Information

Specify:

1. Model 94407 Horizontal Inline Deflagration Flame Arrester
2. Size and Body Material
3. Tube Bank and Hardware Material
4. Type of Flange and Auxillary Connection
5. Special Materials or Coatings, If Required

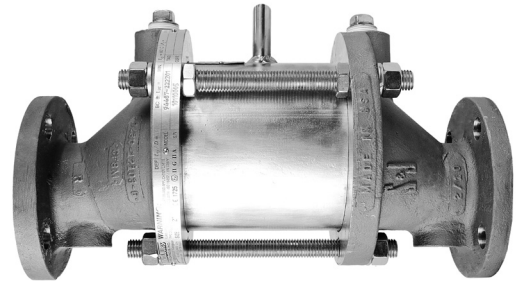


Table AB - Size & Body* Table CD - Tube Bank and Hardware*

Option AB	Size (Inches)	Body Material	Option CD	Tube Bank Material Shell/Element	Hardware Material	Shipping Wt. (lbs)
23	2	Cast Aluminum	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	15
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
33	3	Cast Aluminum	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	25
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
43	4	Cast Aluminum	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	45
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
63	6	Cast Aluminum	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	69
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
83	8	Cast Aluminum	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	93
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
03	10	Cast Aluminum	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	165
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
13	12	Cast Aluminum	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	200
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	

*NOTE: Aluminum and Cast Iron bodies are only ISO 16852 approved.
 Raised Face not available in Aluminum bodies. Other material combinations available.

Table AB - Size & Body* Table CD - Tube Bank and Hardware*

Option AB	Size (Inches)	Body Material	Option CD	Tube Bank Material Shell/Element	Hardware Material	Shipping Wt. (lbs)
20	2	Cast Steel	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	43
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
22	2	Cast 316 SS	22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
30	3	Cast Steel	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	65
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
32	3	Cast 316 SS	22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
40	4	Cast Steel	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	120
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
42	4	Cast 316 SS	22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
60	6	Cast Steel	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	207
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
62	6	Cast 316 SS	22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
80	8	Cast Steel	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	280
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
82	8	Cast 316 SS	22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	

*NOTE: Aluminum and Cast Iron bodies are only ISO 16852 approved.
 Raised Face not available in Aluminum bodies. Other material combinations available.

L&J Technologies or any of its subsidiaries assume no responsibility and shall not be liable for any damage, injury or death caused by the mis-application or improper installation of the products that it provides. Installation shall be per manufacturer's instructions in accordance to any applicable local, state or federal regulations. It is the responsibility of the purchaser to ensure these guidelines are followed and that the products are applied properly.

Table AB - Size & Body* Table CD - Tube Bank and Hardware*

Option AB	Size (Inches)	Body Material	Option CD	Tube Bank Material Shell/Element	Hardware Material	Shipping Wt. (lbs)
00	10	Cast Steel	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	480
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
02	10	Cast 316 SS	22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
10	12	Cast Steel	00	Carbon Steel / 304 Stainless Steel	18-8 Stainless Steel	610
			01	Carbon Steel / 304 Stainless Steel	304 Stainless Steel	
			22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	
12	12	Cast 316 SS	22	316 Stainless Steel / 316 Stainless Steel	316 Stainless Steel	

*NOTE: Aluminum and Cast Iron bodies are only ISO 16852 approved.
Raised Face not available in Aluminum bodies. Other material combinations available.

Table E - Flange Type

Option E	Description
0	ANSI 125/150lb. FF
1	ANSI 125/150lb. RF*
2	EN1092-1 PN10 FF
3	EN1092-1 PN10 RF*
4	EN1092-1 PN16 FF
5	EN1092-1 PN16 RF*
6	FF JIS 10K FF
7	JIS 10K RF*
8	Special Drilling

*Raised Face Flanges Not Available in Aluminum.
Note: Raised faced flanges with smooth finish are standard.
For optional serrated raised faced flanges, consult factory.

Table F - Auxillary Connections

Option F	Description	Quantity
0 ⁽¹⁾	3/4" NPT (Uni-Directional)	1
1	3/4" NPT (Bi-Directional)	2
2	3/4" NPT (Bi-Directional)	4
4	3/4" NPT (U) ⁽²⁾ w/1/2" NPT (Drain)	3 ⁽³⁾
5	3/4" NPT (B) ⁽²⁾ w/1/2" NPT (Drain)	4 ⁽³⁾
6	3/4" NPT (B) ⁽²⁾ w/1/2" NPT (Drain)	6 ⁽³⁾

1. Flow Direction Label Affixed to Cast Body.
2. U = Uni-Directional; B = Bi-Directional.
3. Includes two drain connections - one per side.

Tube Banks Only*

Part Number	Size (Inches)	Tube Bank Material Shell/Element	Shipping Wt. (lbs.)
9440-10000	2	Steel / 304 SS	22
9440-10010		316 SS / 316 SS	25
9440-10001	3	Steel / 304 SS	30
9440-10011		316 SS / 316 SS	35
9440-10002	4	Steel / 304 SS	55
9440-10012		316 SS / 316 SS	60
9440-10003	6	Steel / 304 SS	90
9440-10013		316 SS / 316 SS	100
9440-10004	8	Steel / 304 SS	145
9440-10014		316 SS / 316 SS	160
9440-10005	10	Steel / 304 SS	225
9440-10015		316 SS / 316 SS	240
9440-10006	12	Steel / 304 SS	310
9440-10016		316 SS / 316 SS	325

*Other Material Combinations Available.