

94313 Detonation Flame Arresters

The Shand & Jurs Detonation Flame Arresters provide protection against flame propagation through piping runs and vapor recovery systems, while allowing maximum flow efficiencies. This design quenches a flame front approaching from either direction, even if it has transitioned to a detonation. The Arresters contain a detonation while retaining the integrity of both the arresting element and the housing. This is ensured by the design of the passages in the tube bank and the detonation resistant construction.

Standard construction of the housing is available in Carbon Steel or 316 Stainless Steel. The tube bank is Stainless Steel throughout. Special construction materials to withstand the corrosive actions of some vapors and atmospheric conditions are available upon request.

These models are available in a range of sizes from 2" through 24". Additional sizes available upon request. Standard connections are ANSI 150lb. or 300lb. Class raised face flanges. EN1092-1 sizes available.



Features

- Withstands instantaneous pressure at the Flame front in excess of 500 psig
- Tube bank design ensures consistent functioning
- Carbon steel or 316SS housing construction, 316SS tube bank
- Optional fittings for pressure taps or temperature probes
- Standard drain plug
- Pressure and temperature taps optional

Specifications

Sizes:

2", 3", 4", 6"

Service/Approval:

NEC Group 'C & D' Vapor

Max. Operating Pressure:

2" size 18 PSIA (3.3 PSIG)
3"-6" Size 16.5 PSIA (1.8 PSIG)

Flange Rating:

ANSI 150# RF or 300#RF

Materials of Construction

Carbon Steel or 316 Stainless Steel Body and 316SS Tube Bank


Class 150 lb.

Size	2"	3"	4"	6"
"A"	29 1/16	33 5/16	36 1/16	43 1/16
"B"	6	7 1/2	9	11
"C"	9	11	13 1/2	19

Class 300 lb.

Size	2"	3"	4"	6"
"A"	30 5/16	35 1/16	37 5/16	45 1/16
"B"	6 1/2	8 1/4	10	12 1/2
"C"	10	12 1/2	15	20 1/2

Dimensions

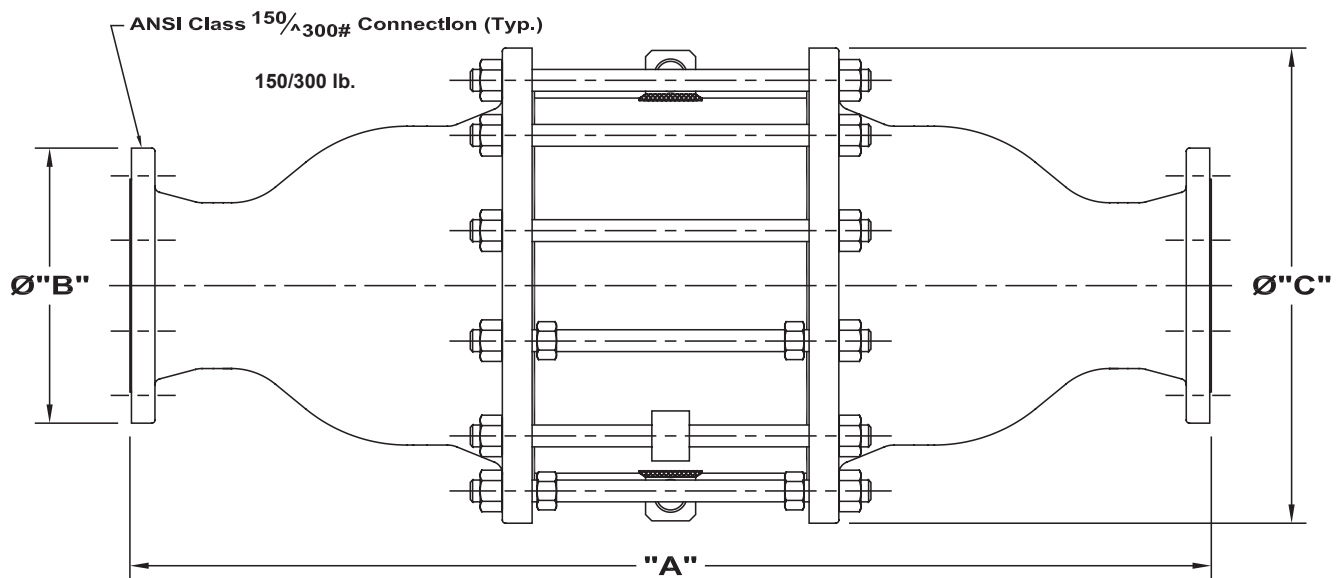

All designs subject to change. Certified dimensions and specifications available upon request.

94313 Ordering Guide

Model Number Selection

The model number will consist of a base number **94313** followed by 6 digit numbers. These digits will represent 6 option tables.

94313 - AB - CD - EF - GH

Ordering Information

Specify:

1. Model 94313 Detonation Flame Arrester
2. Size, Body Material, and Service
3. Optional Body Taps (for pressure or temperature sensing or additional drains)
4. Optional Materials of Construction as Required



Table AB - Inlet & Outlet Size

Table AB	Size
02	2"
03	3"
04	4"
06	6"

Table CD

Option CD	Body & Shell	Hardware
03	*Steel	316 Stainless Steel
04	316 Stainless Steel	316 Stainless Steel

* Standard Paint

Table EF - Flange Size

Option EF	Description
01	ANSI 150 lb. Flange RF
02	ANSI 300 lb. Flange RF

Table G - Body Taps

Option G	Description
0	None
1	NPT
2	Socket Weld
3	Flanged

Table H - Number of Taps (on each side)

Option G	Description
1	1
2	2

L&J Technologies or any of its subsidiaries assume no responsibility and shall not be liable for any damage, injury or death caused by the mis-application or improper installation of the products that it provides. Installation shall be per manufacturer's instructions in accordance to any applicable local, state or federal regulations. It is the responsibility of the purchaser to ensure these guidelines are followed and that the products are applied properly.